

**TREE SEAL®** is a fast, effective dressing designed to aid healing of pruning cuts, grafts, abrasions, and wounds on woody plants and trees. It prevents excessive sap flow and provides a protective barrier against water, insects, and disease. It can also be used to seal and waterproof clay and wood planting pots and tubs, gutters, flashings, and small patches on asphalt driveways and walkways.

**HOW TO USE:**

Stir well before using. Apply with a brush, putty knife, trowel, or similar tool. If necessary, thin with plain water. Allow to dry between coats.

**WHERE TO USE:**

**ROSES, WOODY SHRUBS, and TREES.** Treat all pruning cuts over ½ inch in diameter. Cut decayed or dead limbs to sound wood before painting. Apply TREE SEAL® to all exposed wood and adjacent bark.

**WOUNDS and ABRASIONS.** Trim ragged edges and surfaces, then paint to cover damaged area thoroughly.

**CLAY and WOOD PLANTING POTS and TUBS.** Paint the inner surfaces lightly and thoroughly. To seal small cracks and holes, make two applications, allowing first application to set overnight.


**GUTTERS, FLASHINGS, and small patches on ASPHALT DRIVEWAYS and WALKWAYS:** Make two applications, allowing first application to set

overnight. To seal small cracks and holes in cement floors, mix three parts clean sand with one part Tree Seal. Apply with a trowel or putty knife.

**PRECAUTIONS:** Do not heat. Do not use in rainy weather. Do not thin with oils or solvents. Do not allow container to freeze. Clean all tools with soap and water immediately after use. Harmful if swallowed. Avoid contact with eyes and skin. In case of contact, flush eyes with fresh water for at least 15 minutes. For skin, wash with white mineral oil, wipe off excess and then wash with soap and water. Get medical attention if irritation persists. Do not apply to humans, pets, or birds.

**CONTAINS:** Asphalt 45%, siliceous materials 15%, and water 40%.

**NOTICE:** Buyer assumes all responsibility for safety and use not in accordance with directions.

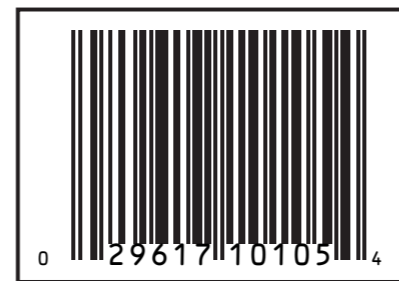

Distributed by:  
**LILLY MILLER BRANDS**  
PO BOX 2289  
CLACKAMAS, OR 97015

[www.lillymiller.com](http://www.lillymiller.com)

09101020 - 01/05

**MORRISON'S**  
SINCE 1925

**TREE SEAL®**

**Net Contents One Gallon (3.7 l)**

**Aids healing of cuts, grafts, abrasions, and wounds on woody plants and trees**

**Protects against water, insects, and disease**

**Seals planters, gutters, and asphalt**

GAP (NO PRINT IN THIS AREA)

T704128PR SPEC: 20.5 x 5 minus .5 for gap